



BF - Frontier

High-Resolution Image and High-Throughput System

Inline High Resolution and High Speed Automated Optical Inspection Machine

Industry-Leading High Throughput

The Alternate Color Digital Scanning System (*1) provide a single scan of capturing the entire PCB image with high throughput. The Scanning speed is only 22sec for the extra large size PCB (460mm*500mm).

(*1) The liner scanning and alternate lightning system capture the multi images of the whole PCB at a single scan.

High-Resolution Imaging System

The superior resolution; 18 μ m with color line CCD provide more accurate and stable capability to inspect the solder fillet on the small components such as the highly density mounted 0201 (0603) chip and 0.4mm pitch lead.

High Accuracy

The Telecentric Lens(*2) and **the Automatic Digital Shading System(*3)** increase the repeatability and the compatibility, and hence provide high accuracy of the inspection result. And **Ball Screw Table Scan(*4)** also provide high repeatability and compatibility of machine accuracy.

(*2)The table with the PCB is moving while capturing. Table is moved by ball screw.

(*3) The unique lens developed is able to compensate the distortion (the field angle) of the image for a more accurate detection.

(*4)The brightness of each pixel for a clearer image is calibrated automatically.



Accurate Inspection Results

The Multi Lightening Technology(*5) is newly developed to improve the inspection capability of the solder fillet after reflow process, especially to detect the lifted chip and the lifted lead.

(*5) New Lower lighting is add to conventional lightings; the side lighting and the co-axial overhead lighting.

Real Time SPC Information

The real time SPC information is shown to support the management of production quality, and therefore the increase of production yield.

BF-Frontier together with the analysis packages such as BF-Repair, BF-Editor, BF-Monitor, Net-View classify defects in real time during inspection, providing immediate feedback on defect types.



BF - Frontier

High-Resolution Image and High-Throughput System

Model

BF-Frontier

System Specifications

Conveyable Board Size 50*50 – 460*500mm

Board Thickness Range 0.3 – 4.0mm

Board Plainness 2mm

Clearance Top: 40mm
from PCB Bottom: 40mm

Rotated Component Support Available for 0 - 359 ° rotation (unit of 1 °)

Inspection Items Missing, Shift, Miss Alignment, Tomb Stone, Reverse, Polarity, Other component, Bridge, Dirt, Dust, No Solder, Short Solder, Cold Solder, Lifted Chip, Lifted Lead, Un Insertion, OCR (Optical Character Recognition/Verification)

Scanning Speed (PCB Length[mm]+30)/14.6(mm/s)
460*500mm : 22s

Typical Inspection Speed 0.1ms/Window

Load/Unload Time 4 sec

Image Resolution 18 μ m

Camera (Image Processing) Color line CCD

Lighting System White LED

Conveyor Type Flat belt

Adjustment of Conveyor Auto and Manual

Conveyor Pass Line 900+/- 20mm

OS Windows2000 (Choose from Japanese, English)

Inspection Output OK/NG signal, Display on monitor, marking by an internal plotter, role paper printer*, Data file to BF-Repair*, Dada file, Data base to Net-View* (*: Option)

System Requirements

Electrical Requirement AC 100, 115, 200, 220, 240V, 800W, 50/60Hz


Compressed Air Requirement 0.5Mpa, 5L/min

Temperature/Humidity 15 to 30 degree C/ 5 to 80 % RH (No Condensation)

Foot Print Dimensions (w*d*h) (W)850*(D)1380*(H)1310mm

Weight 450 Kg

Dimensions

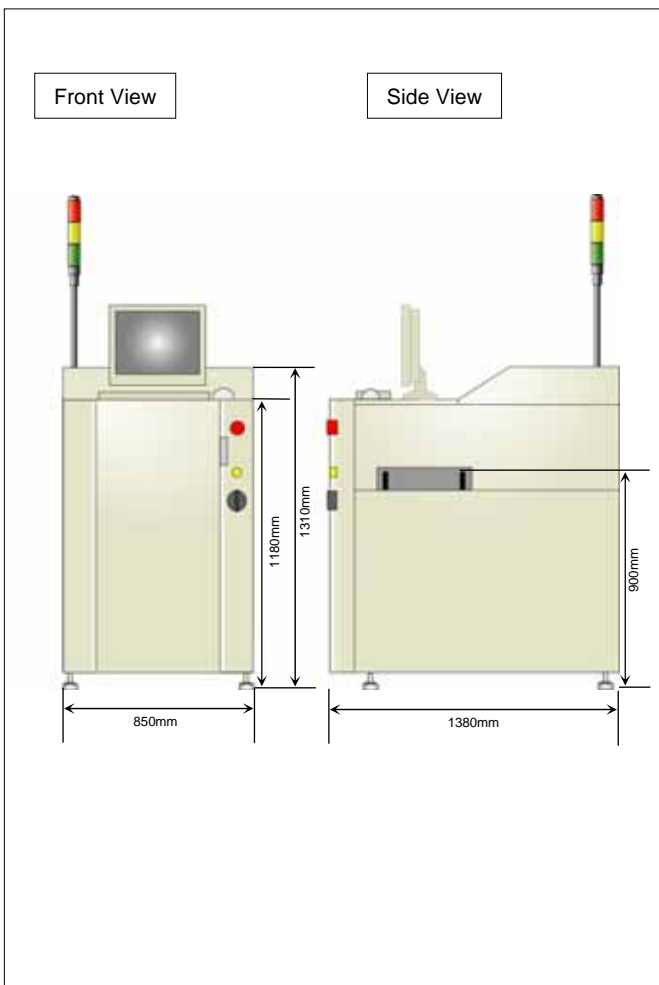

SAKI Corporation
Japan Head Office
Shinagawa Intercity A-31F
2-15-1, Kounan, Minato-ku,
Tokyo, 108-6031, Japan
Phone: +81-(0)3-5796-0393
Fax: +81-(0)3-5796-0399
E-mail: sakicorp@sakicorp.com
Http://www.sakicorp.com

SAKI Corporation
Japan KOBE Branch Office
KOBÉ-Itocho Building 4F-E
121 Itocho, Chuo-ku, Kobe-City,
Kobe, 650-0032, Japan
Phone: +81-(0)78-392-5509
Fax: +81-(0)78-392-5517

SAKI (SHANGHAI) CO., LTD.
Room 306, No 1600 West Nanjing Road
Jing' an District, Shanghai 200040, China
Phone: +86-21-6249-2758
Fax: +86-21-6249-2760

The specifications in this catalog are subject to change without notice due to improvement.
(C)2004 SAKI Corporation, All Right Reserved.