


ondaTaper

Taping of harnesses for the automotive, aviation and many other industries. Efficient, high quality with Ondal taping machines.

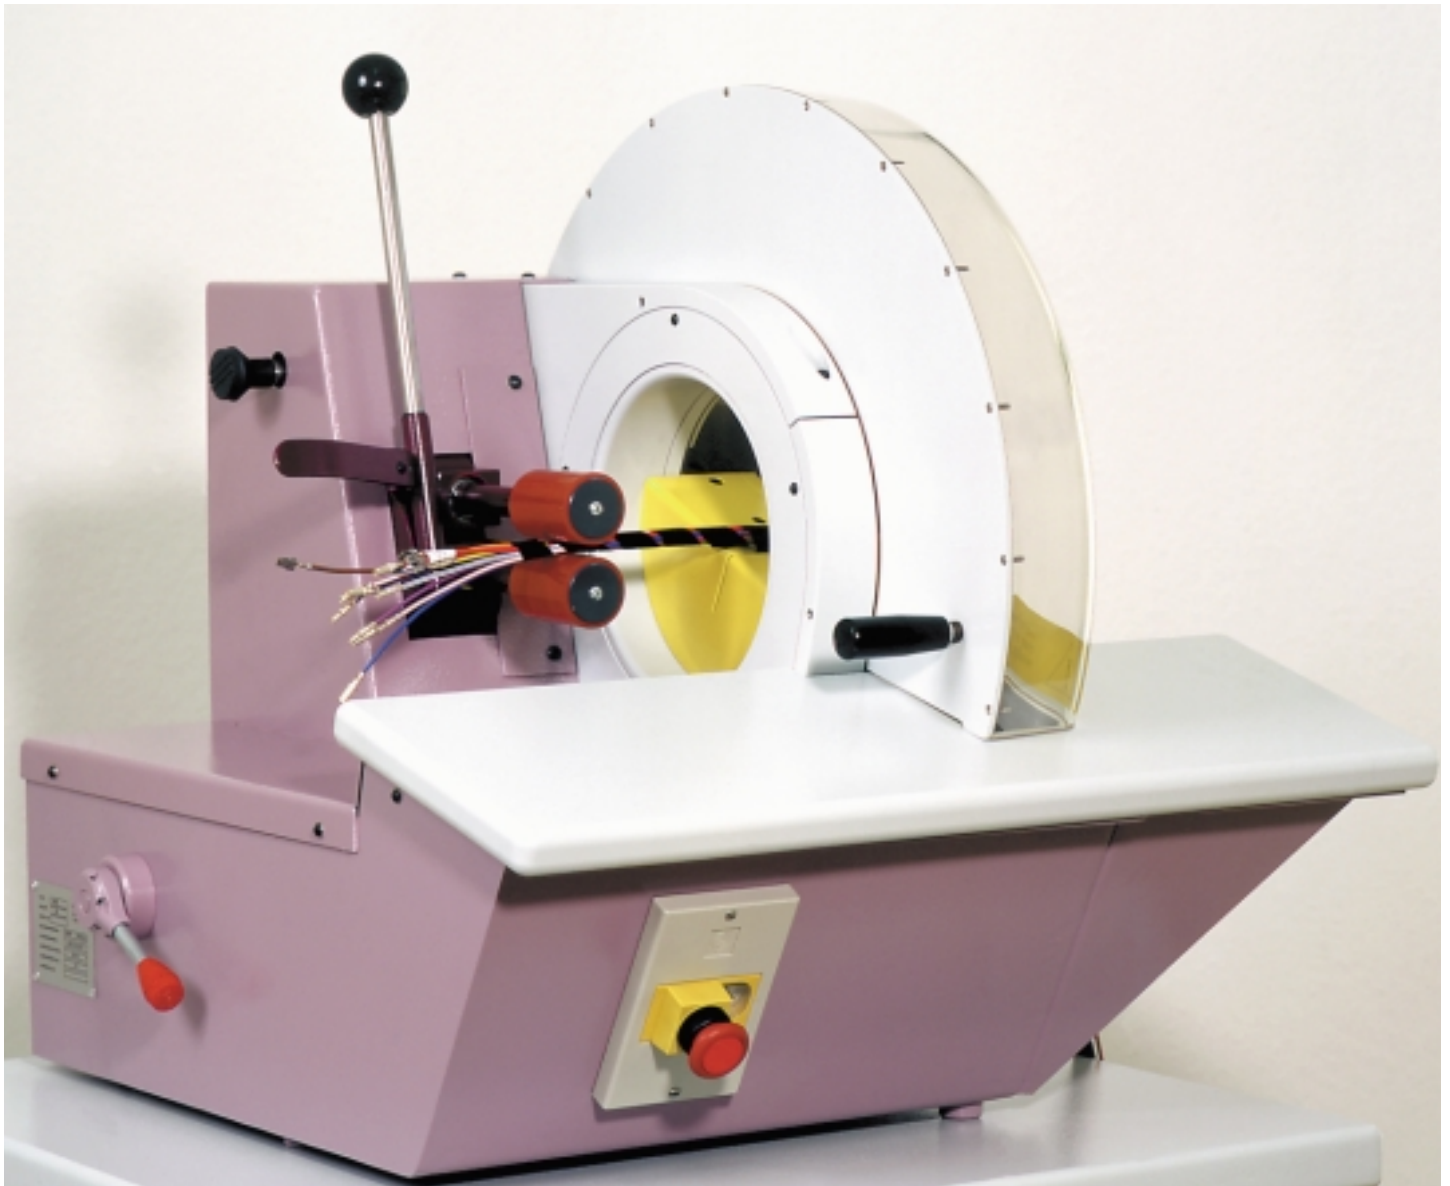

The cable taping machine ondaTaper is a handy and versatile machine and requires very little space.

onda

HANDY AND FLEXIBLE, IDEAL FOR UNIVERSAL APPLICATIONS

The Ondal taping machine ondaTaper represents a basis machine for all taping processes:

- ▶ Closed and spiral open windings.
- ▶ Adhesive and non-adhesive tape.
- ▶ Foam and felt tape.
- ▶ Easy to transport where ever needed.
- ▶ Easy to operate without any problems.
- ▶ Flexible adjustment for the winding speed by flexible foot switch.
- ▶ Simple and rapid resetting for processing different tape rollers.

- ▶ 1", 1,5" and 3" mandrels.
- ▶ Patented pendulum roller guide prevents the individual strands from twisting.
- ▶ Low space requirement: only 600 mm x 625 mm floor space.

Options:

- ▶ Roller feed, infinitely variable from 0-40 mm/rev.
- ▶ Integrated cutter for rapid cutting.

THE TECHNICAL DATA OF THE ONDAL TAPING MACHINE ONDATAPER

<i>Electric connections:</i>	230-240 Volt 1 phase
<i>Drive:</i>	DC motor
<i>Resolutions:</i>	500 r.p.m.
<i>Feed:</i>	0-40 mm/rev.
<i>Speed:</i>	max. 20 m/min
<i>Pneumatic connection</i>	not necessary
<i>Tape:</i>	Adhesive and non adhesive
<i>Tape diameter:</i>	max. 200 mm 1", 1,5" oder 3" centre hole
<i>Security facility:</i>	TÜV-GS-label Interlocked safety guards.
<i>Options:</i>	Rollerfeed Felt and foam tape attachment. External brake for non adhesive tape.
<i>Weight:</i>	40 kg
<i>Dimensions:</i>	600 x 625 mm

